

Air Filter + Regulator + Lubricator

3 Units Air Combination

Series AAC, ABC

ANSSION
PNEUMATIC & HYDRAULIC

◆ How to Order

ABC 3000 - D




AAC



ABC

Symbol



Drain type

Nil	Semi-auto Drain
M	Manual Drain
A	Auto Drain

* "A" Only for AB Series.

Port size

2000	G1/4	3000	G3/8	4000	G1/2
------	------	------	------	------	------

Air Filter+Regulator+Lubricator



AAC	AA Series	ABC	AB Series
-----	-----------	-----	-----------

◆ Specifications

Model		AAC2000	ABC2000	ABC3000	ABC4000
Fluid		Air			
Port size		G1/4	G1/4	G3/8	G1/2
Filtration		40 μ m			
Set pressure range		0.05~0.85 MPa			
Max.operating pressure		0.95 MPa			
Proof pressure		1.5 MPa			
Ambient and fluid temperature		5~60℃			
Fluid bowl capacity		15 cc	60 cc		
Lubricator bowl capacity		25 cc	90 cc		
Recommended lubricant		Turbin oil class 1(ISO VG32)			
Weight		0.7 Kg	0.9 Kg		
Combination equipment	Air filter	AAF2000	ABF2000	ABF3000	ABF4000
	Regulator	AAR2000	ABR2000	ABR3000	ABR4000
	Lubricator	AAL2000	ABL2000	ABL3000	ABL4000

◆ Dimensions

AAC

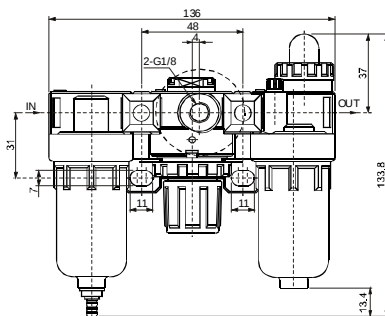

ABC

