

# Air Filter Series UF

**ANSSION**  
PNEUMATIC & HYDRAULIC

### ◆ How to Order




UF - 02 N C D B

Nil	Without bracket		
B	With bracket		
<b>Drain type</b>			
Nil	Semi-auto drain		
D	Auto drain		
H	Manual drain		
<b>Filtration</b>			
Nil	5 μ m	C	40 μ m
<b>Thread</b>			
Nil	G	N	NPT
<b>Port size</b>			
02	1/4	06	3/4
03	3/8	08	1
04	1/2		
<b>Air Filter</b>			

### ◆ Specifications


Model	UF-02	UF-03	UF-04	UF-06	UF-08
Port size	1/4	3/8	1/2	3/4	1
Fluid	Air				
Body material	Aluminum die-cast				
Bowl material	Polycarbonate(standard)				
Filtration	5 μ m(standard),40 μ m(option)				
Set pressure range	0.05~0.99 MPa				
Max. Inlet pressure(standard)	1.2 MPa				
Max. Flow rate	2440	2450	3030	8250	8860
Ambient and fluid temperature	-10℃~60℃(No freezing)				
Filter bowl capacity	105cc		210cc		
Standard drain	Semi-automatoc drain (below 0.05MPa)				
Net weight for standard	530g			1250g	

Symbol




### ◆ Dimensions

UF-02,03,04

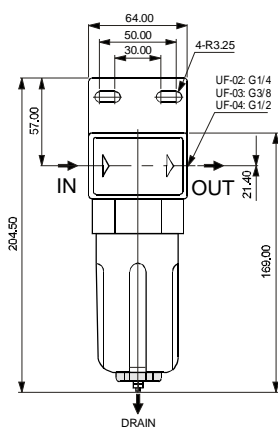

UF-06,08

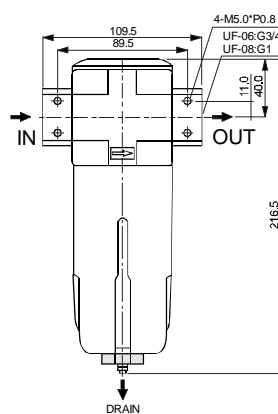

III
AD401,402
AC
AW
AF
AR
AL
UFRL
UFR/L
<b>UFR</b>
<b>UF</b>
UR
UL
FRL700A
FRL600A
FR500A
F200A
NR200
R 200
L200A
AAC,ABC
AAF,ABFC
AAFR,ABFR
AAF,ABF
AAR,ABR
AAL,ABL
<b>SFC</b>
<b>SFR</b>
SL