



Compact slide cylinder——HLH Series

■ Product series

Series name	Acting type	Bore size	Collocation of sensor switch	
			DS1-H	
HLH	Double acting	6		
		10	●	
		16	●	
		20	●	

Page | 316 | 403

■ Installation and application

1. Dirty substances in the pipe must be eliminated before cylinder is connected with pipeline to prevent the entrance of impurities into the cylinder.
2. The medium used by cylinder should be filtered to 40 μm or below.
3. Anti-freezing measure shall be adopted under low temperature environment to prevent moisture freezing.
4. If the cylinder is dismantled and stored for a long time, pay attention to conduct anti-rust treatment to the surface. Anti-dust caps shall be added in air inlet and outlet ports.



■ Criteria for selection: Cylinder thrust

Unit: Newton(N)

Bore size (mm)	Rod size (mm)	Acting type	Pressure area (mm ²)	Operating pressure(MPa)						
				0.1	0.2	0.3	0.4	0.5	0.6	0.7
6	3	Double acting	Push side	28.3	-	5.7	8.5	11.3	14.2	17.0
			Pull side	21.2	-	4.2	6.4	8.5	10.6	12.7
10	4	Double acting	Push side	78.5	7.9	15.7	23.6	31.4	39.3	47.1
			Pull side	66.0	6.6	13.2	19.8	26.4	33.0	39.6
16	6	Double acting	Push side	201.0	20.1	40.2	60.3	80.4	100.5	120.6
			Pull side	172.7	17.3	34.5	51.8	69.1	86.4	103.6
20	8	Double acting	Push side	314.0	31.4	62.8	94.2	125.6	157.0	188.4
			Pull side	263.8	26.4	52.8	79.1	105.5	131.9	158.3



Compact slide cylinder

AIR TAC

HLH Series



Specification

Bore size(mm)	6	10	16	20
Guide rail width mm	5	7	9	12
Acting type	Double acting			
Fluid	Air(to be filtered by 40 μ m filter element)			
Operating pressure	$\phi 6$	0.15~0.7MPa(22~100psi)(1.5~7.0bar)		
Others		0.06~0.7MPa(9~100psi)(0.6~7.0bar)		
Proof pressure		1.05MPa(150psi)(10.5bar)		
Temperature $^{\circ}$ C		-20~70		
Speed range mm/s		50~500		
Allowable kinetic energy J	0.008	0.025	0.05	0.1
Stroke tolerance		+1.0 0		
Cushion type		Bumper		
Sensor switches ①		DS1-H□N, DS1-H□P		
Port size		M5 \times 0.8		


① Sensor switch should be ordered additionally, please refer to P403~426 for detail of sensor switch.

Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke
6	5 10 15 20 25 30	30
10	5 10 15 20 25 30 40 50	50
16, 20	5 10 15 20 25 30 40 50 60	60


Note) Consult us for non-standard stroke.

Explain of model

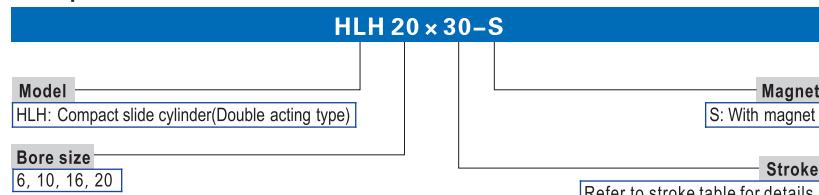


Model Selection Method

- Select the bore size according to the thrust and practicality. Refer to the table on page 315.
- Determine the selection conditions in order, starting from the upper row in the table below, and choose one of the selection graphs to be used.

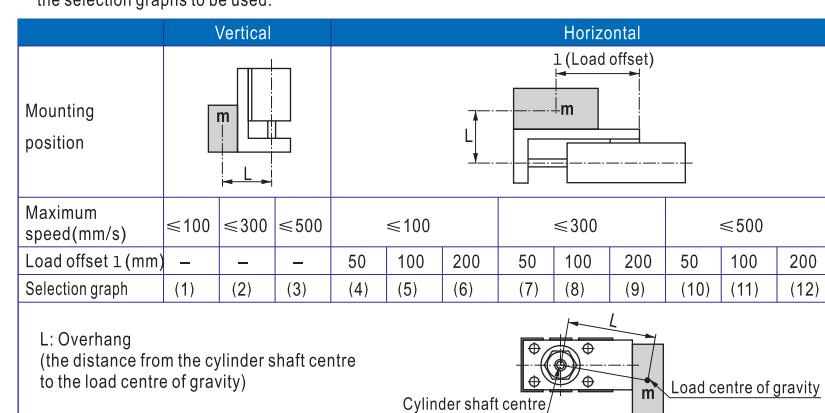


2.1) The relation between loading and overhang(Selection graphs)

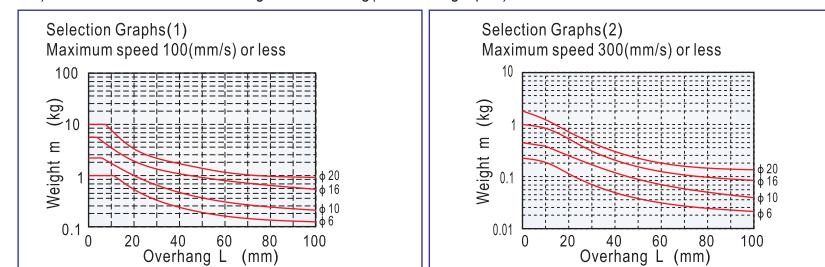

Product feature

- Miniature linear roller ball bearing integrated wise cylinder.
- With the excellent straightness and non-rotation precision, it is more suitable for precision assembly.
- Mounting is possible from 4 directions.
- Piping is possible from 3 directions.

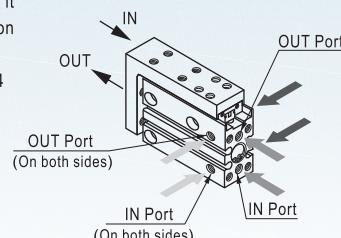

HLH

Ordering code

Model can be changed Ordering code. Example:

Production type: HLH

Bore size: 16mm

Stroke: 50mm

Magnet: With magnet

Model:HLH16 × 50-S











Ordering code: HLH 16 S 0050

Model	●	Stroke	●
Bore size	●	In 4 digits	
06: $\phi 6$ mm			
10: $\phi 10$ mm			
16: $\phi 16$ mm			
20: $\phi 20$ mm			
● Magnet		S: With magnet	

Compact slide cylinder

AIR TAC

HLH Series

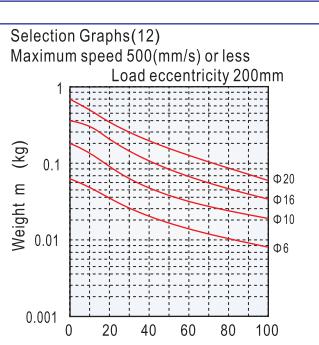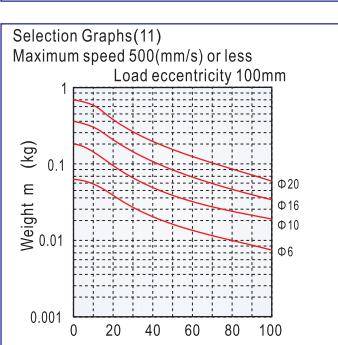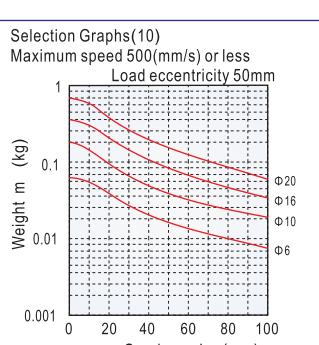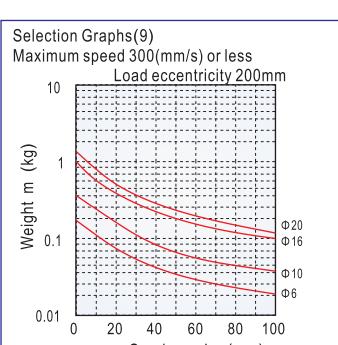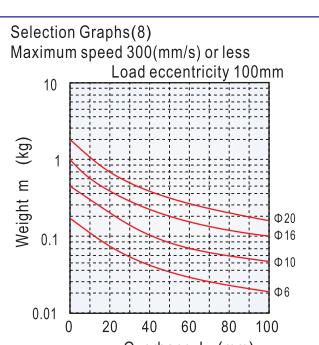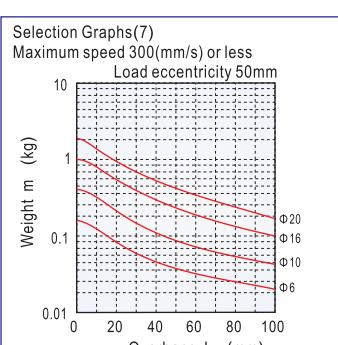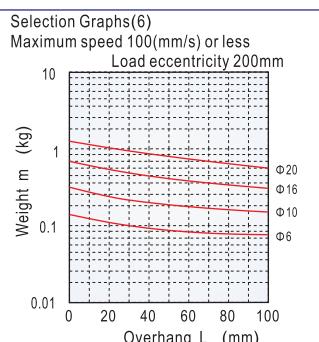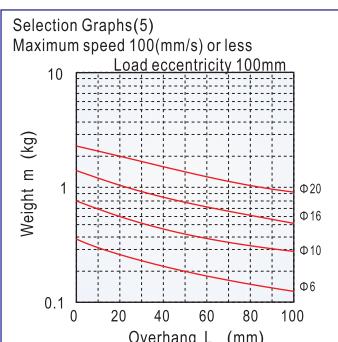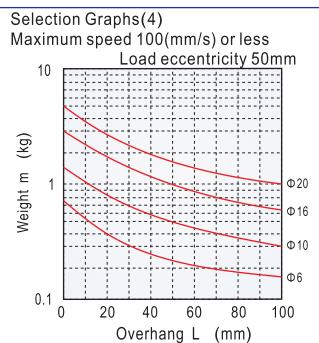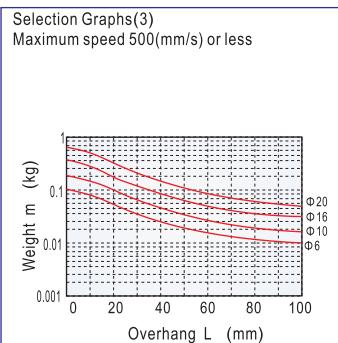

2.2) Selection Examples

Example ①: Mounting: Vertical
Maximum speed: 500mm/s
Overhang: 40mm
Load weight: 0.1Kg

Refer to Graph based on vertical mounting and a speed of 500mm/s. In Graph , find the intersection of a 40mm overhang and load weight of 0.1Kg, which results in a selection of $\varnothing 20$.


Example ②: Mounting: Horizontal
Maximum speed: 500mm/s
Load eccentricity: 50mm
Overhang: 30mm
Load weight: 0.1Kg

Refer to Graph based on horizontal mounting, a speed of 500mm/s and load eccentricity of 50mm.In Graph , find the intersection of a 30mm overhang and load weight of 0.1Kg, which results in a selection of $\varnothing 16$.

■ Installation and application

1. The actual loading and moment of cylinder must be less than its allowable loading and moment:


1.1) The allowable moment of cylinder

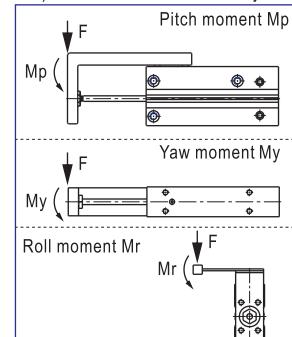

Model	Allowable torque (Nm)		
	Pitch moment Mp	Yaw moment My	Roll moment Mr
HLH6	0.25	0.25	0.41
HLH10	0.77	0.79	1.17
HLH16	1.62	1.62	3.03
HLH20	2.84	2.95	4.80

1.2) When the cylinder is subjected to different type of moment, there will be different degree of shift in performance, please refer to the following table for details.

Table deflection due to pitch moment
Table deflection (arrow) when a load acts upon the section marked with the arrow at the full stroke of the compact slide.

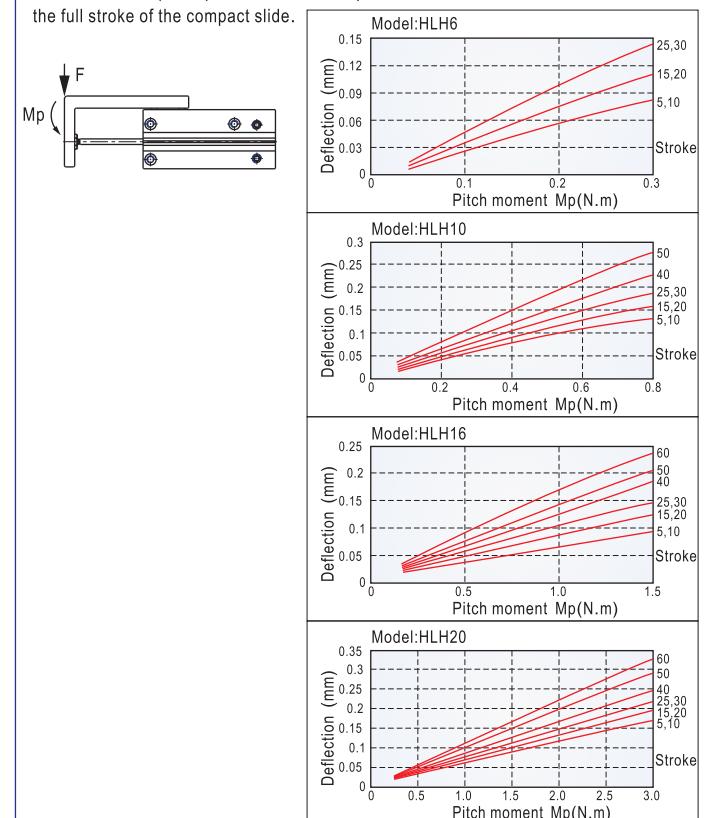


Compact slide cylinder

AIRTAC


HLH Series

- 7.2) Since the table is supported by the linear guide, take care not to apply strong impact or large moment to the guide section.
 7.3) Hold the slide when fastening work pieces with bolts, If the body is held while tightening bolts, excessive moment may damage guide section.

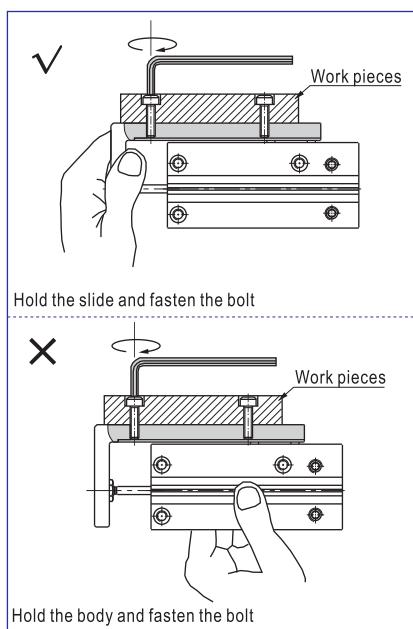


Dimensions

HLH6

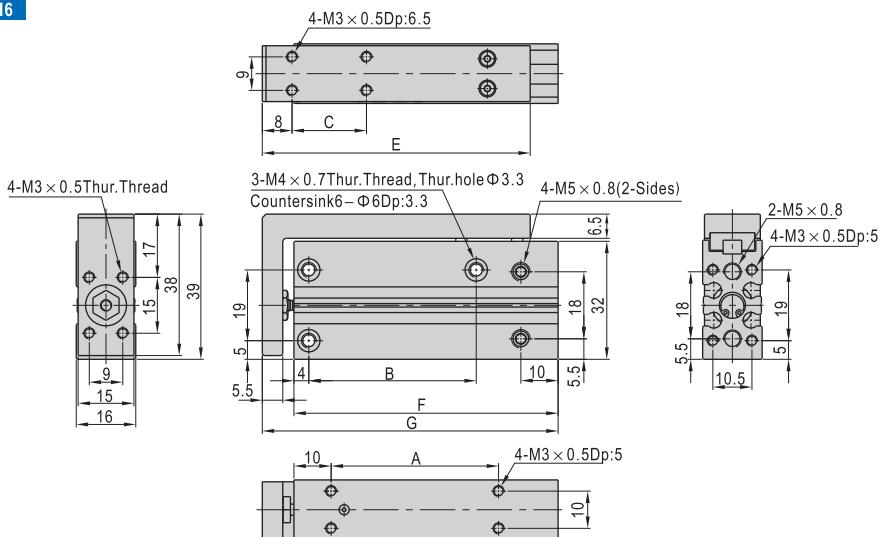

Stroke\Item	A	B	C	E	F	G
5	10	14	10	42	36	44.5
10	15	14	10	42	41	49.5
15	20	24	20	52	46	54.5
20	25	24	20	52	51	59.5
25	30	30	30	62	56	64.5
30	35	30	30	62	61	69.5

HLH10

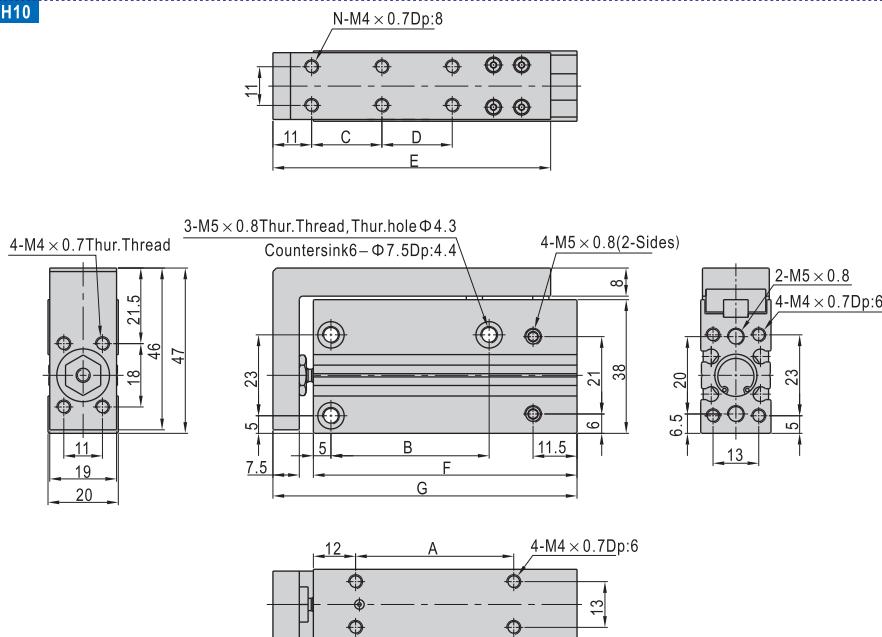


Stroke\Item	N	A	B	C	D	E	F	G
5	4	10	14	10	-	49	40	51.5
10	4	15	14	10	-	49	45	56.5
15	4	20	24	20	-	59	50	61.5
20	4	25	24	20	-	59	55	66.5
25	4	30	30	30	-	69	60	71.5
30	4	35	30	30	-	69	65	76.5
40	6	45	45	20	20	79	75	86.5
50	6	55	55	25	25	89	85	96.5



HLH

Inner structure

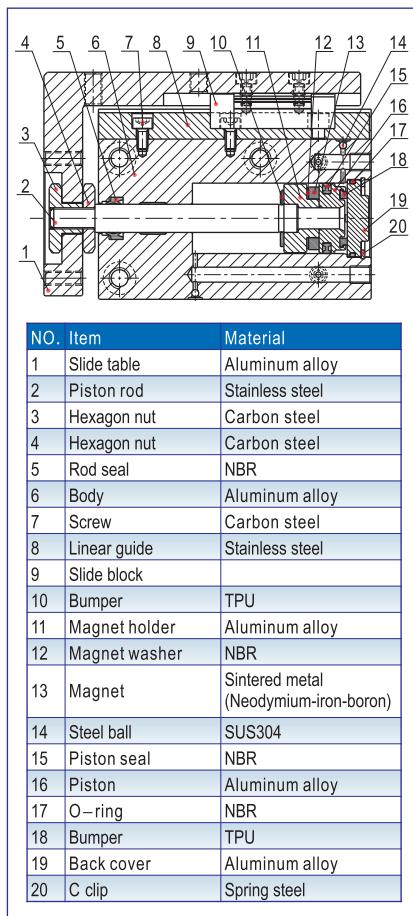


Compact slide cylinder


AIRTAC

HLH Series

HLH16

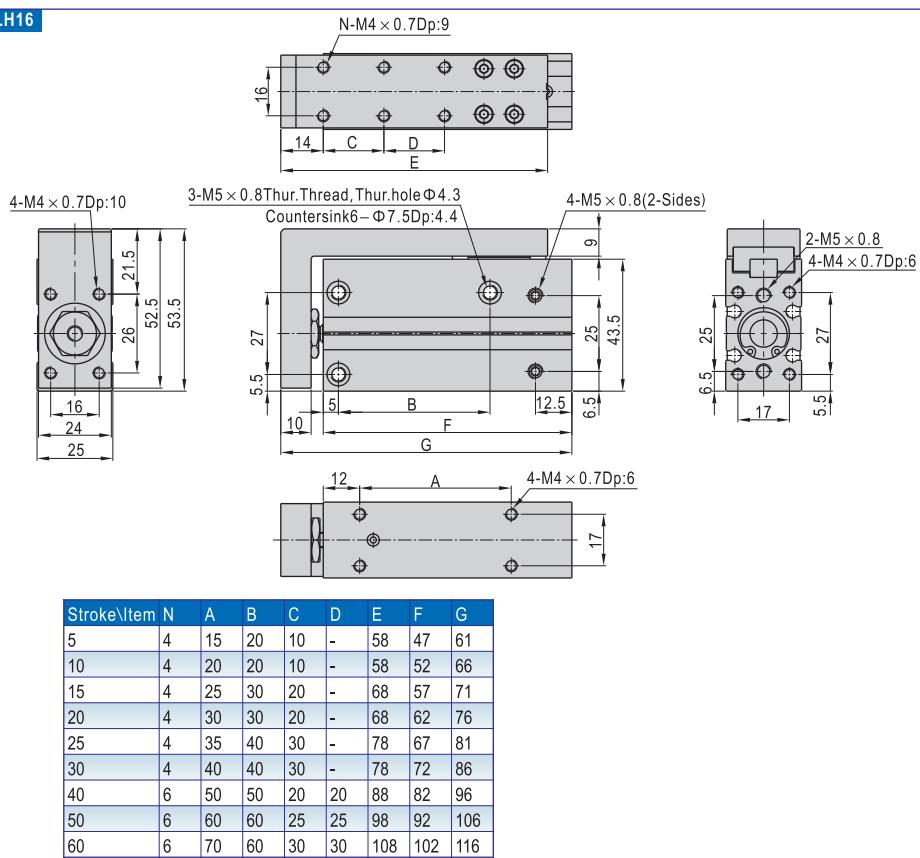

HLH20

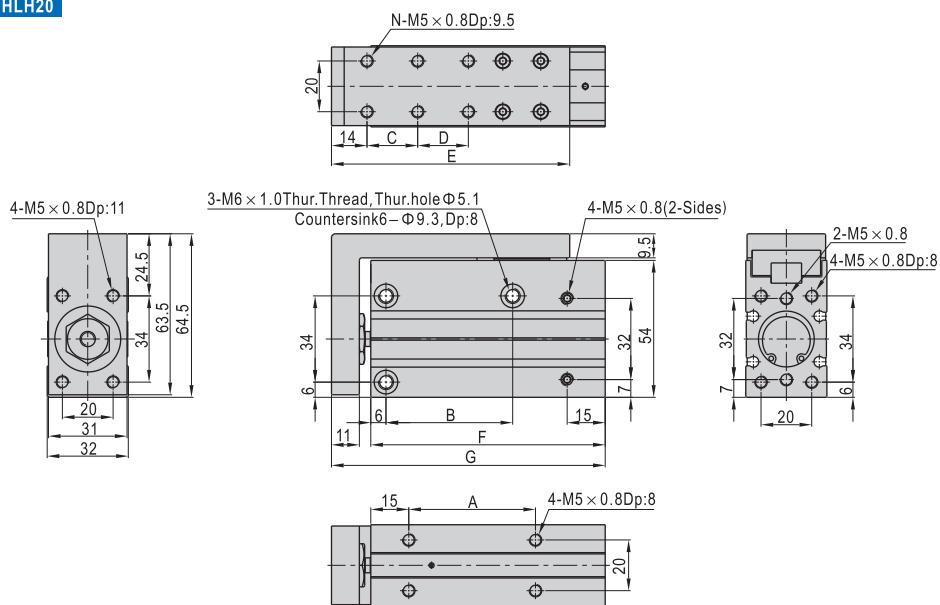

Stroke\Item	N	A	B	C	D	E	F	G
5	4	15	20	10	-	64	57.5	73
10	4	20	20	10	-	64	62.5	78
15	4	25	25	20	-	74	67.5	83
20	4	30	25	20	-	74	72.5	88
25	4	35	40	30	-	84	77.5	93
30	4	40	40	30	-	84	82.5	98
40	6	50	50	20	20	94	92.5	108
50	6	60	70	25	25	104	102.5	118
60	6	70	70	30	30	114	112.5	128