


# Fluid control valve(2/2way)

**AIRTAC**

## 2V Series



### Symbol



### Product feature

#### 2V025 series


1. Direct acting and normally closed type 2/2 way solenoid valve. Its high sensibility allows it to change direction quickly.
2. The structure is small and compact.
3. The valve body is made of brass which is heat resistance and the coil conforms to Class B classification. The seals are made of fluorine rubber (VITON) which is suitable for several types of working medium.

#### 2V130 and 250 series


1. This 2/2 way diaphragm piloted solenoid valve has low energy consumption and large air flow .
2. The starting pressure is low and the operational differential pressure is < 0.05MPa.
3. The valve body is made of brass which is heat resistance and the coil conforms to Class B classification . The seals are made of NBR.

### Inner structure

#### 2V025 Terminal

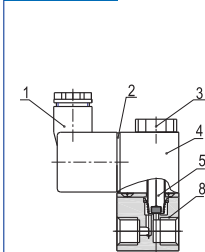

#### 2V250 Terminal

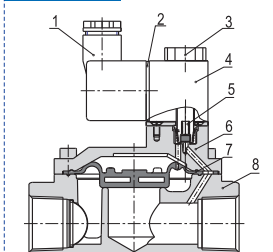

No.	Item	No.	Item	No.	Item	No.	Item
1	Connector	3	Nut	5	Armature assembly	7	Diaphragm
2	Connector gasket	4	Coil	6	Body cover	8	Body

### Specification

Model	2V025-06	2V025-08	2V130-10	2V130-15	2V250-20	2V250-25
Fluid	Air. Water. Oil					
Acting	Direct acting		Internally piloted acting			
Type	Normally closed					
Orifice size(Φmm)	2.5	2.5	13.0	13.0	25.0	25.0
Cv valve	0.23	0.25	6.20	6.20	13.00	13.00
Port size ①	1/8"	1/4"	3/8"	1/2"	3/4"	1"
Viscosity limit	Under 20CST					
Pressure range	0~1.0MPa(0~145psi)		0.05~1.0MPa(7~145psi)			
Proof pressure	1.5MPa(215psi)					
Material body	Brass with zinc plated		Brass			
Seal material	VITON		NBR			
Min. activating time sec	0.05 sec and below					

① PT thread, NPT thread and G thread are available.

### Specification of coil

Valve type	Power type	Frequency (Hz)	Voltage range	Electrical entry	Power Consumption (VA/W)	Insulation	Temp. rise(°C)
2V025	AC	50	± 15%	Terminal Grommet	7.0VA	Class B	35
2V130	DC	60	± 10%		7.0W		45

### Ordering code

2V 025 08 A □ P			
Model	2V: 2 port 2 position solenoid valve	Thread type	P: PT T: NPT G: G
Orifice size	025: Φ2.5mm 130: Φ13mm 250: Φ25mm	Electrical entry	Blank: Terminal I: Grommet
Port size	Orifice size Port size Φ2.5mm 06: 1/8" 08: 1/4" Φ13mm 10: 3/8" 15: 1/2" Φ25mm 20: 3/4" 25: 1"	Voltage	A: AC220V B: DC24V C: AC110V E: AC24V F: DC12V

### Usable fluid

Seal material\Fluid	Water	Dry air	Acetone*	ISOVG32 oil	Glycol*	Nitrogen	Heavy oil	
NBR	○	○	△	○	○	○	○	
Seal material\Fluid	JIS# 1 Oil	JIS#3 Oil	Vegetable Oil	Inorganic Oil	Start Oil	Silicagel Oil	CO <sub>2</sub>	Argon
NBR	○	○	○	○	○	○	○	○

1 Note: ◎ = Excellent(nearly without affect). ○ = Good(workable though some affect). △ = Poor(large affect).

2 Note: "\*" means inflammanable and explosive dangerous fluid. Please use the relative explosion proof coil.

3 Note: Please consult the technical department before using fluid that has not been shown in the above table.







# Fluid control valve(2/2way)

**AIRTAC**


## 2V Series

### Flow chart

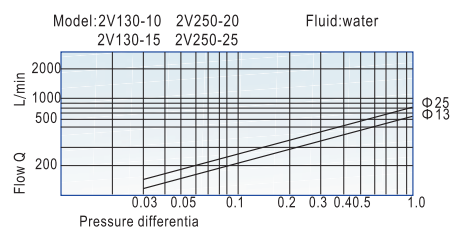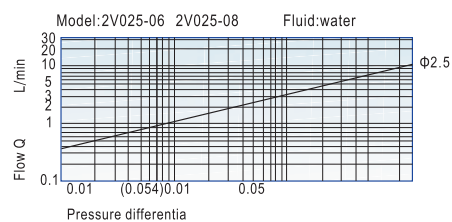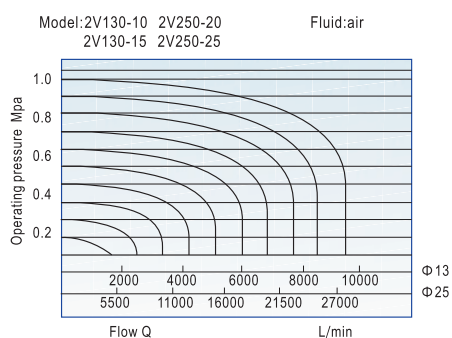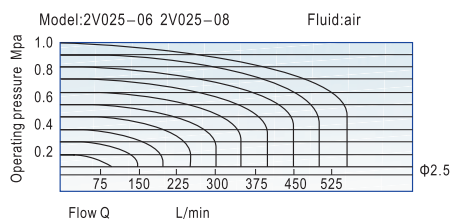


### Dimensions


#### 2V025 Terminal

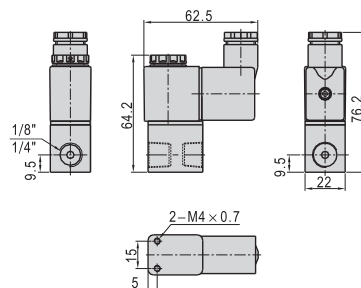


#### 2V025 Grommet

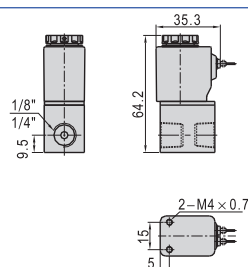

#### 2V130, 250 Terminal

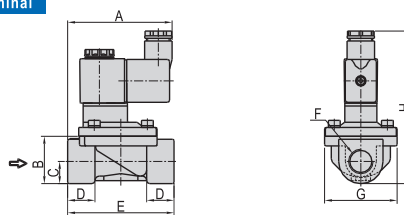

#### 2V130, 250 Grommet

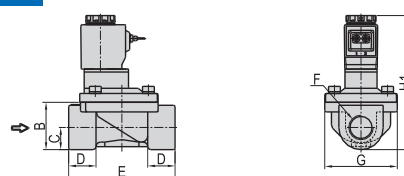

Model\Item	A	B	C	D	E	F	H	H1
2V130-10	70.7	32	15	18.5	72	3/8"	49	103.2
2V130-15	70.7	32	15	18.5	72	1/2"	49	103.2
2V250-20	73.7	45	21	23	102	3/4"	77.5	120
2V250-25	73.7	45	21	23	102	1"	77.5	120



2V